

TUNNEL MONITORING BROCHURE


JUNHO 2013

Tel: (+351) 21 843 64 00
Fax: (+351) 21 843 64 09
geral@bhb.pt www.bhb.pt

Tunnel Monitoring



- Visibility
- Air speed,
- Direction of air flow
- Temperature
- Trace gas concentration (CO, NO, NO₂)

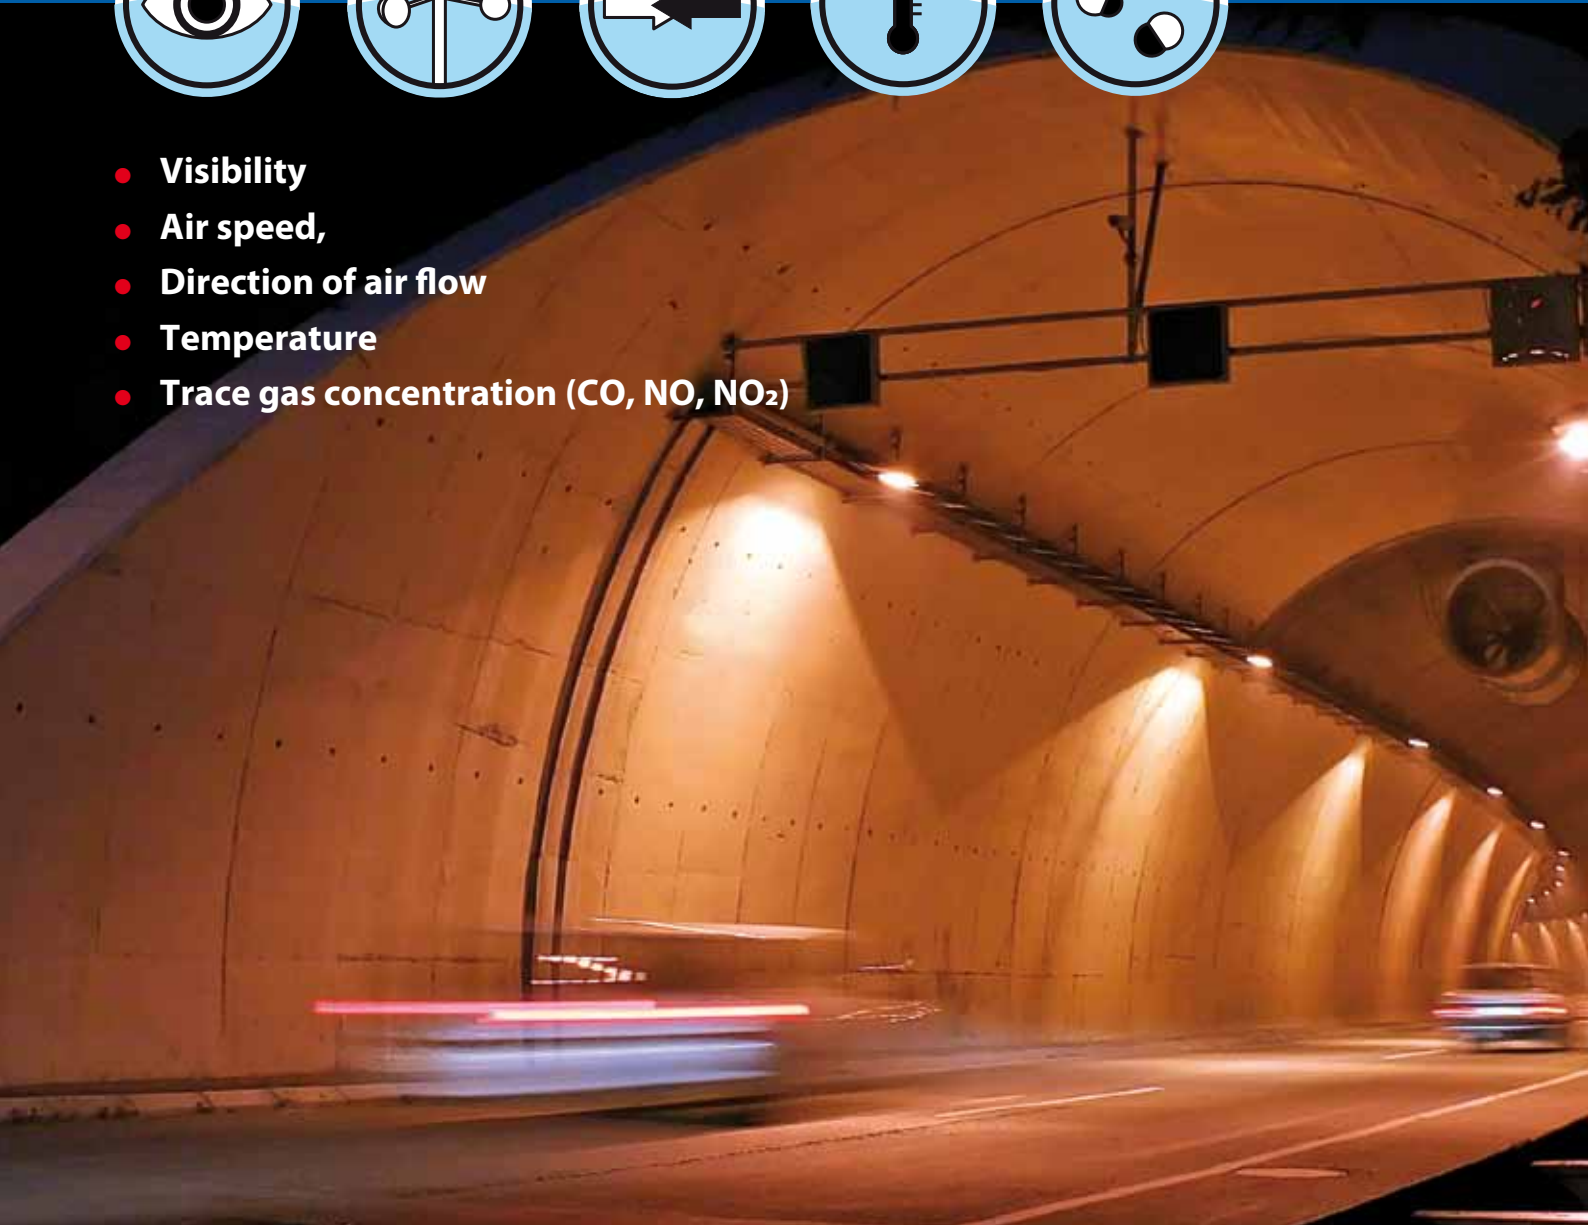

Application

Ventilation in tunnels shall provide for adequate breathing air for drivers and maintenance staff in tunnels as well as for sufficient visibility in the tunnel atmosphere which is contaminated with exhaust and dust. Also emission of pollutants to the environment shall be minimized and in case of fire it shall reduce the effect of heat and smoke.

DURAG produces service reduced sensors and analysers, which precisely and reliably transmit the data of tunnel atmosphere to the ventilation control system.


2004/54/EC "tunnel" guideline as well as the national specifications for installations in tunnels are included in the design of DURAG sensors.

Redundancy and system stability are essential. Therefore DURAG offers separated sensors. This allows the ventilation control system to effectively perform the mandatory plausibility checks of the sensor signals. Separated sensors can be placed at the ideal mounting positions.

The sensors are rugged and will withstand corrosive tunnel atmosphere as well as tunnel cleaning procedures. The units can be mounted quickly. Maintenance is minimized and units can be exchanged in case of malfunction immediately.


The DURAG delivery program includes sensors and analysers for

- Visibility
- Air speed and direction of air flow
- Trace gas concentration (CO, NO, NO₂)
- Particulate measurement (PM 2.5 and PM 10).

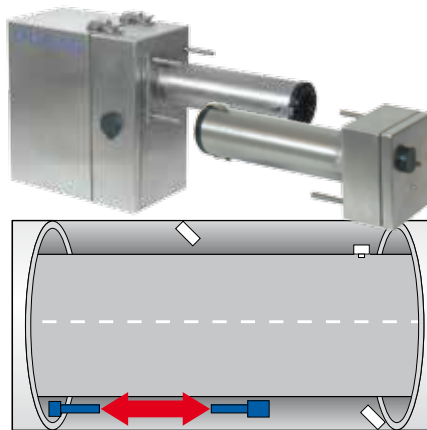


D-RV 290 Visibility Monitor

- Continuous measurement of visibility parallel to tunnel axis
- Representative measurement along a 10-12m measuring path
- Suitable for early fire detection
- Easy installation and menu-driven operation
- Window contamination correction performed automatically
- Long maintenance intervals
- Rugged SS316Ti stainless steel housing, IP65 enclosure rating

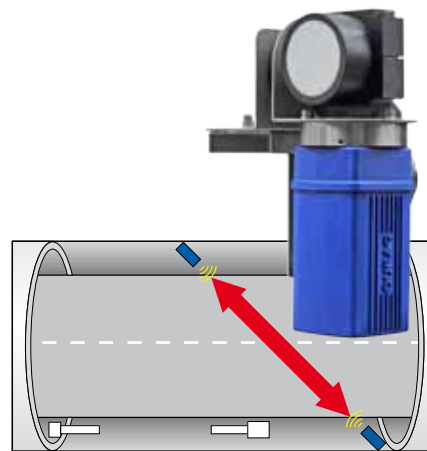

D-FL 220T Ultrasonic Air Flow Monitor

- Continuous measurement of flow velocity, direction and temperature
- Representative measurement across the tunnel profile
- Principle follows the evaluation of differential transition times of ultrasonic pulses
- Automatic zero-point and span test
- No separate control unit required
- Minimized maintenance requirements
- Corrosion resistant
- No influence of smoke on the system in case of fire.

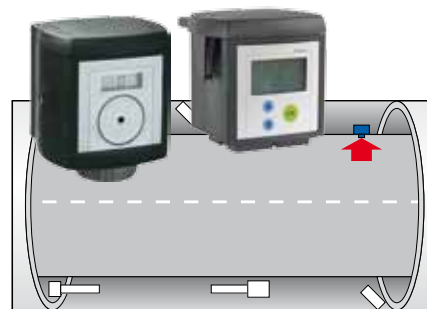

D-G 102 PM / D-G 105 PA Trace Gas Sensor Systems

- Modular stationary system for local measurement of trace gases CO or NO or NO₂
- System consists of docking station, transmitter electronics and a sensor as consumable item
- The docking station is mounted and wired
- No wiring work is required when the transmitter is mounted or dismantled to the docking station
- Transmitter available for signal transfer as 4-20mA signal (D-G 102 PM) or via Profibus PA (D-G 105 PA)
- Electrochemical sensors include memory with sensor data and are plugged to transmitter
- Electrochemical sensors are available for CO or NO or NO₂.

DURAG

DURAG GmbH
Kollaustrasse 105,
22453 Hamburg, Germany
Tel. +49 (0)40 55 42 18-0
E-Mail: info@durag.de

DURAG France S.a.r.l.
Parc GIP Charles de Gaulle
49, rue Léonard de Vinci
95691 Goussainville CEDEX
France
Tel. +33 (0)1 301 811 80
E-Mail: info@durag-france.fr

DURAG UK Office
Suite 17, Brookside Business Park
Cold Meece, Stone, Staffordshire
ST15 0RZ, United Kingdom
Tel: +44 (0)1785 760 007
E-Mail: durag.uk@durag.de

DURAG, Inc., USA,
1355 Mendota Heights Road
Suite 200, Mendota Heights
MN 55120, USA
Tel. +1 651 451-1710
E-Mail: durag@durag.com

DURAG India
Instrumentation Ltd
#143/16, Ground Floor
4th Main Road
Industrial Town, Rajajinagar
Bengaluru 560 044, India
Tel. +91 (0)80 23 14 56 26
E-Mail: info@duragindia.com

DURAG data systems

DURAG data systems
Kollaustraße 105,
22453 Hamburg, Germany
Tel. +49 (0)40 55 42 18-0
E-Mail: info@durag.de

DURAG process & systems technology gmbh,
Kollaustraße 105,
22453 Hamburg, Germany
Tel. +49 (0)40 55 42 18-0
E-Mail: info@durag-process.de

Hegwein

Hegwein GmbH,
Am Boschwerk 7
70469 Stuttgart, Germany
Tel. +49 (0)711 135 788-0
E-Mail: info@hegwein.de

SMITSVONK®
Smitsvonk Holland B.V.
Loodstraat 57
2718 RV Zoetermeer
Netherlands
Tel. +31 (0)79 361 35 33
E-Mail: sales@smitsvonk.nl

VEREWA

VEREWA GmbH
Kollaustrasse 105
22453 Hamburg
Germany
Tel. +49 (0)40 55 42 18-0
E-Mail: verewa@durag.de

www.durag.de

Contactos/Contacts:

Comercial/Commercial:

Luís Ferreira da Costa
e-mail: luiscosta@bhb.pt
Tel: (+351) 21 843 64 00
Fax: (+351) 21 843 64 07

Assistência/Service:

Joaquim Picante
e-mail: jpicante@bhb.pt
Tel: (+351) 21 843 64 00
24 Horas: (+351) 96 523 73 93



Note:

DURAG, Inc., the owner of this document, reserves the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. DURAG, Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

Copyright© 2011

DURAG, Inc. All rights reserved

Tel: (+351) 21 843 64 00
Fax: (+351) 21 843 64 09
geral@bhb.pt www.bhb.pt