

# Turn Key Solutions BROCHURE


JUNHO 2013

Tel: (+351) 21 843 64 00  
Fax: (+351) 21 843 64 09  
geral@bhb.pt [www.bhb.pt](http://www.bhb.pt)

# TKS-C

## TURNKEY SOLUTION FOR SOLAR POWER PLANTS

**Container Installation**  
1 MVA to 1.6 MVA

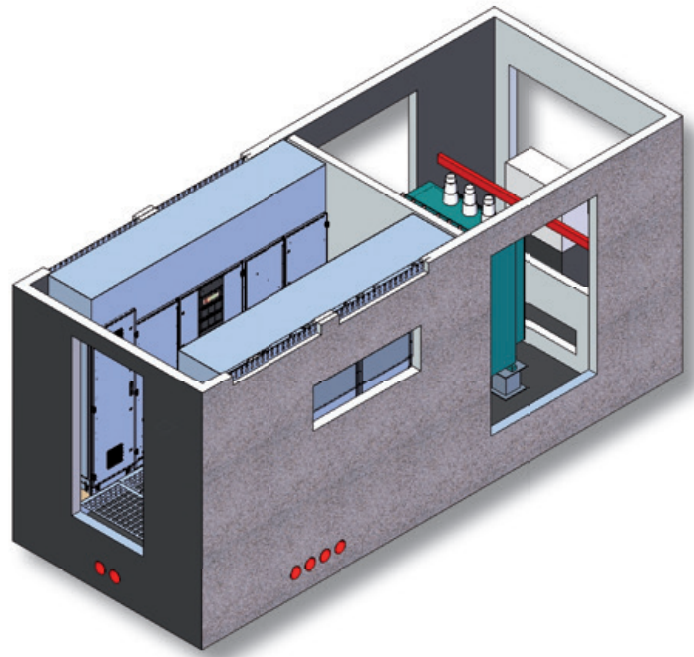

The TKS-C (Turnkey Solution Container) is a fully integrated solution that has been developed specifically for use in photovoltaic power plants. It comprises

- » up to two solar central inverters,
- » switchgear,
- » a medium-voltage transformer,
- » measuring and monitoring components, and
- » data communication capabilities.

The container is split into two areas: the inverter compartment and the medium-voltage compartment containing the switchgear and transformer. Furthermore AEG PS has developed two separate cooling circuits for the inverter cubicle; the cooling air from these is purified by filters.

The features that really make the TKS-C concrete solution stand out are not only its ability to be put into operation rapidly, but also its durability, thermal and sound insulation, and superior fire protection properties.

### **Straightforward installation in utility-scale projects**

The TKS-C is a turnkey system. It is connected to the PV panel on one side, to the transfer station on the other side, and can be put into operation immediately. The TKS-C is also delivered to the installation site fully equipped and tested. This means that there is no need for on-site integration work – saving constructors considerable time and costs.

### **Efficiency, adaptability**

The TKS-C system includes tried-and-tested high-performance central inverters from AEG Power Solutions' Protect PV product range. These are able to reach proven peak efficiency levels of more than 98%. The maximum efficiency that the inverters offer is also accompanied by superior availability. The innovative FPGA circuit ensures flexible, precise and rapid control, while the ability to assign parameters freely and flexibly enables compatibility with all grid standards. Not only this, but the system also offers an unrivalled thermal operating range of -20 °C to +40 °C.

The TKS-C container solution is used in PV systems across the world and consistently proves an outstanding choice thanks to the long service life it offers in harsh environments.

	TKS-C 1000	TKS-C 1250	TKS-C 1600
DC INPUT			
Recom. PV power <sup>*1</sup>	2 x 680 kWp	2 x 890 kWp	2 x 1150 kWp
DC voltage window	385 - 1000 V	465 - 1000 V	486 - 1000 V
Max. DC voltage	1000 V		
Nominal DC voltage	660 V	685 V	696 V
UMPPT voltage range according EN50530	500 - 820 V	550 - 820 V	573 - 820 V
Max. DC current	2 x 1060 A	2 x 1170 A	2 x 1440 A
Number of independent MPP inputs	2		
Number of fused DC inputs	up to 16 pairs		
Quantity DC circuit breaker	2 MCCB		
Fuse size	max. 250 A	max. 315 A	max. 400 A
Over voltage protection	Grade 2		
AC OUTPUT			
Nom. AC power at cos φ = 1 (@ 45 °C)	1000 kVA	1250 kVA	1590 kVA
Nom. AC power at cos φ = 1 (@ 25 °C)	1100 kVA	1375 kVA	1750 kVA
Power factor, adjustable	lag 0.9 – 1 – lead 0.9		
MV-connection <sup>*2</sup>	10 kV-20 kV, as required		
Output Current (max) @25 °C	64.7 A/32.3 A	79.67 A/39.83 A	101.61 A/50.80 A
Mains frequency	50/60 Hz		
Current distortion	< 3%		
GENERAL DATA			
Efficiency <sup>*3</sup> (Max./Euro/CEC)	98.4 %/98.2 %/98.2 %	98.4 %/98.2 %/98.2 %	98.9 %/98.6 %/98.7 %
External power supply	TN-S, 230 V 50/60 Hz		
Operating temperature	-20 °C to +40 °C		
Rel. humidity	15 - 95 % non condensing		
Protection grade, EN 60529	IP 23 D		
Altitude above sea level	1,500 m (3000 m max. 30 °C)		
Dimensions (W x H x D)	2.75 x 3.28 x 6.05	2.75 x 3.30 x 6.05	2.75 x 3.32 x 6.85
Weight	ca. 33 T	ca. 34 T	ca. 35 T
Equipment color	customized		
Consumption of auxiliaries during operation	< 4000 W		
Consumption of auxiliaries during night	200 W		
Air quality (EN60721-3-4)	Class 4S2		
CE Certificate	Yes		
Grid monitoring	FNN (VDN, BDEW)		
ALARM & CONTROLS			
Earth fault monitoring	Yes		
Monitored over voltage protection	Yes		
Contactor and breaker position	Yes		
System off	Yes		
Failure indicators (acoustic/optical)	3 status LED, detailed history		
COMMUNICATION			
Display	240 x 64 graphical LC Display and 4 display keys		
Hardware	RS 485, RS 232, CAN BUS, Ethernet Freely programmable opto coupler inputs and dry contacts		
Telecom line	ISDN, GSM, GPRS, DSL		
Software/Protocol	Modbus, Profibus DP, Web portal, CANopen CiA 437		
Over voltage protection	Option		
OPTIONS			
MV transformer	Yes		
MV switchgear	Yes		
String monitoring	Yes		
Zone monitoring	No		Yes
PV plant control	Yes		
“Copain” mode (Team-Master/Slave)	Yes		No

\*1: Depending on local environmental conditions - \*2: External transformer necessary

\*3: Without transformer (LV/MV) - Technical data is preliminary and subject to change without prior notice.

AEGPS-TKS-C-EN-12-2013 - Technical data in this document does not contain any binding guarantees or warranties. Content only serves for information purposes and can be modified at any time. We will make binding commitments only upon receipt of concrete enquiries and customer notification of the relevant conditions. Due to the non-binding nature of these terms, we assume liability neither for the accuracy nor completeness of the data provided here. AEG is a registered trademark used under license from AB Electrolux.

## Contactos/Contacts:

### Comercial/Commercial:

Francisco Lopes

e-mail: [flopes@bhb.pt](mailto:flopes@bhb.pt)

Tel: (+351) 21 843 64 00

Fax: (+351) 21 843 64 09

### Assistência/Service:

Joaquim Picante

e-mail: [jpicante@bhb.pt](mailto:jpicante@bhb.pt)

Tel: (+351) 21 843 64 00

24 Horas: (+351) 96 523 73 93

