

Remote Flame Sensors BROCHURE

JUNHO 2013

Tel: (+351) 21 843 64 00
Fax: (+351) 21 843 64 09
geral@bhb.pt www.bhb.pt

Flame sensor

Flame sensors for the monitoring of gas, oil and coal flames, primarily in single burner furnaces.

Features

- Self-monitoring and fail-safe in conjunction with a control unit/burner control
- Flame sensors for every spectral range of flame monitoring from UV to IR
- Connection to D-UG 120 and D-UG 660 control unit as well as D-GF 150 burner control
- Uniform output signal thus mutually interchangeable
- Compliance to general safety regulations.

Applications

- Power stations
- Chemical industry
- Refineries
- Cement plants
- Waste incinerators
- Steam generators
- Heating plants.

Certifications

- DVGW
- APAVE
- UL 372
- FM Class 7610
- AGA: AG 210
- GOST-R.



D-LE 103...

Functional description

The photo element in the flame sensor generates a signal which is proportional to the flame radiation intensity. The output signal of the flame sensor is used as an input signal to a control unit or a burner control.

The D-LE 103 flame sensor is available with different photo elements for optimal selectivity when using different fuels.

Models

- Cable gland (-CG)
- Axial plug (-P).


Accessories

- **Optical adjustment aid** for alignment of the swivel mount on the sighting tube (D-ZS 118)
- **UV-C test light source** 230 V / 50 Hz (D-ZS 077-10)
- **UV-A, UV-B und IR test light source** 230 V/50 Hz (D-ZS 093)
- **Swivel Mount** for alignment of flame sensor to the flame to be monitored (D-ZS 033 - I)
- **Thermal isolator** with electrical insulation (D-ZS 117 - I)
- **Ball valve** for closing sighting tube (D-ZS 133 - I)
- **Terminal box** for connecting flame sensor (D-ZS 140)

Flame sensor selection

Flame sensor	Suitable for fuels			
	Gas	Oil	Coal	Wood
D-LE 103 UL	++	+		
D-LE 103 UAF	o	++		
D-LE 103 UA	+	++	o	+
D-LE 103 IS	!	++	++	+
D-LE 103 IG	o	++	++	++

++ ideally suited + well suited o conditionally suited ! not permitted (from experience)

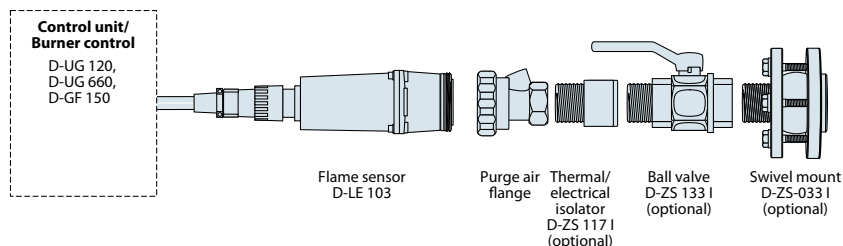

Operational mode	Intermittent operation, continuous operation and 72-hour operation without permanent supervision	Viewing angle	6°
Safety	self-monitoring and fail-safe in conjunction with a control unit/burner control	Perm. ambient temperature	-20...+60°C
Protection	with cable gland (D-LE 103...-CG) IP65, with axial plug (D-LE 103...-P) IP67	Dimensions Weight	Ø80 mm, length approx. 350 mm approx. 1 kg
Gain	pre-set	Sighting tube connection	G 1 1/4"
High-pass filter	pre-set	Purge air connection	G 1/2"
Spectral ranges	UV, VIS, IR		



Flame sensor

Flame sensor for the monitoring of gas, oil and coal flames, primarily in multi-burner furnaces.

Features

- Self-monitoring and fail-safe in conjunction with a control unit/burner control
- Flame sensors for every spectral range from UV to IR
- Connection to the D-UG 120 control unit, D-UG 660 control unit as well as to the D-GF 150 burner control
- Uniform output signal thus mutually interchangeable
- Adjustable to different combustion technologies such as exhaust gas recirculation
- Compliance to general safety regulations
- ATEX approved (D-LE 603 .../94 Ex for zone 1 and D-LE 603.../97 Ex for zone 2).

Applications

- Power stations
- Chemical industry
- Refineries
- Cement plants
- Waste incinerators
- Steam generators
- Heating plants.

Certifications

- DVGW
- APAVE
- UL 372
- FM Class 7610
- AGA: AG 210
- GOST-R
- PTB (ATEX).



D-LE 603

Functional description

The photo element in the flame sensor generates a signal which is proportional to the flame radiation intensity. The output signal of the flame sensor is used as an input signal to a control unit or a burner control.

The D-LE 603 flame sensor is available with different photo elements for maximum selectivity when using various fuels.

D-LE 603 / 94 Ex
D-LE 603 / 95 Ex


Accessories

- **Digital display** for optimal alignment of flame sensors (D-ZS 087 - 20)
- **Optical adjustment aid** for alignment of the swivel mount on the sighting tube (D-ZS 118)
- **UV-C test light source** 230 V / 50 Hz (D-ZS 077-10)
- **UV-A, UV-B and IR test light source** 230 V/50 Hz (D-ZS 093)
- **Swivel mount** for the alignment of the flame sensor (D-ZS 033-I)
- **Thermal isolator** with electrical insulation (D-ZS 117 - I)
- **Ball valve** for closing the sighting tube (D-ZS 133 - I)
- **Terminal box** for connecting flame sensor (D-ZS 140).

Flame sensor selection

Flame sensor	Suitable for fuels				Features
	Gas	Oil	Coal	Wood	
D-LE 603 UH	++	o			selective single burner monitoring in multiple-burner plants
D-LE 603 US	++	+			at low UV radiation
D-LE 603 UAF	o	++			with intensive ambient light (neighbouring burners), gain switchover
D-LE 603 UA	+	++	+	o	at low NO _x component, gain switch-over
D-LE 603 UI	++	++	+	+	remote changeover of spectral sensitivity
D-LE 603 IS	!	+	++	+	selective single burner monitoring (coal, oil)
D-LE 603 IG	o	+	++	++	selective single burner monitoring (coal, oil, wood)
D-LE 603 ISE	!		++		dual-channel flame sensor (LOG/LOG)
D-LE 603 ISO	!		++		dual-channel flame sensor (LIN/LOG)

++ ideally suited + well suited o conditionally suited ! not permitted (from experience)

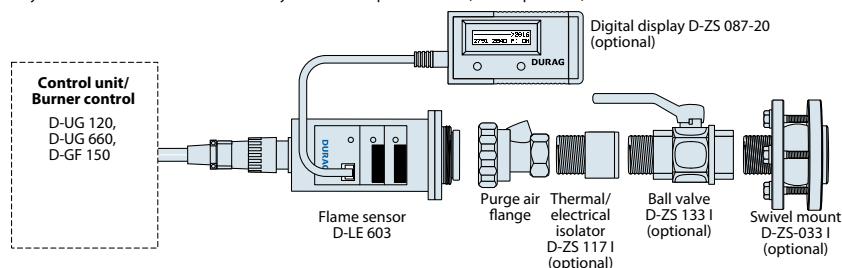

Operational mode	Intermittent operation, continuous operation and 72-hour operation without permanent supervision	Dimensions	90x92 mm, length approx. 350 mm
Safety	Self-monitoring and fail-safe in conjunction with a control unit/burner control	Weight	approx 1.8 kg
Protection class	with cable gland (D-LE 603...-CG) IP65, with axial plug (D-LE 603...-P) IP67	Sighting tube connection	G 1 1/4"
Gain	four settings	Purge air connection	G 1/2"
High-pass filter	three settings	D-LE 603 Ex	
Spectral ranges	UV, VIS, IR	Ex-protection optional	II 2G Ex de IIC T5/T6
Viewing angle	6°	optional	Class I, Div. 1, Group B, C & D
Perm. ambient temperature	-20...+60°C	optional	Class I, Div. 2, Group A, B, C & D
		Weight	approx. 4.3 kg
		Sighting tube connection	G 1"
		Protection class	IP65

Contactos/Contacts:

Comercial/Commercial:

Francisco Lopes

e-mail: flopes@bhb.pt

Tel: (+351) 21 843 64 00

Fax: (+351) 21 843 64 09

Assistência/Service:

Joaquim Picante

e-mail: jpicante@bhb.pt

Tel: (+351) 21 843 64 00

24 Horas: (+351) 96 523 73 93



Note:

DURAG, Inc., the owner of this document, reserves the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. DURAG, Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

Copyright© 2011

DURAG, Inc. All rights reserved

Tel: (+351) 21 843 64 00
Fax: (+351) 21 843 64 09
geral@bhb.pt www.bhb.pt